

SYRINCS



PTK1

User manual **EN**

用户手册 **CN**

GERMANY

Hans-Thomann-Str.1

96138 Burgebrach

Germany

www.syrincs.de

ASIA PACIFIC

1601-02,16/F Seaview

Commercial building,21-24

Connaught Road West,

HongKong

www.syrincs.hk

Table of contents

1 General information about this manual	1
2 For your safety	2
3 Features	3
4 Applications	3
5 Installation	4
6 Technical specifications	7
7 Plug and connection assignment	10
8 Protecting the environment	11

目錄

1 本手冊的一般信息	12
2 安全	13
3 特性	14
4 產品應用場景	14
5 安裝	15
6 技術規格	17
7 插頭和連接	20
8 環境保護	21

1 General information about this manual

This user manual contains important instructions for the safe operation of the unit. Read and follow the safety instructions and all other instructions. Keep the manual for future reference. Make sure that it is available to all those using the device. If you sell the unit, please make sure that the buyer also receives this manual.




Our products are subject to a process of continuous development. Thus, they are subject to change.

Signal words used

All precautions in this manual are clearly highlighted. The following signal words are used for precautions:

DANGER	This warns of dangers that can result in severe injuries or death if the instructions are not followed.
WARNING	This warns of dangers that can result in severe injuries or death and/or cause considerable material damage if the instructions are not followed.
CAUTION	This warns of dangers that can result in reversible injuries and/or considerable material damage if the instructions are not followed.
NOTICE	This warns of dangers that can result to faults during operation and/or considerable material damage. Environmental damage may also occur if the instructions are not followed.

Symbols used

		
General warning of a dangerous location	Warning of suspended load	Notice

2 For your safety

Intended use

This device is designed as a PA system. Use the device only as described in this user manual. Any other use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

This device may be used only by persons with sufficient physical, sensorial, and intellectual abilities and having corresponding knowledge and experience. Other persons are allowed to use this device only if they are supervised or instructed by a person who is responsible for their safety.

Safety instructions



DANGER

Danger for children

Ensure that plastic bags, packaging, etc. are properly disposed of and are not in the reach of babies and young children. Choking hazard!

- Ensure that children do not detach any small parts (e.g. knobs or the like) from the product. They could swallow the pieces and choke!
- Never let children play unattended with the electrical devices.



CAUTION

Possible hearing damage

The device can produce volume levels that may cause temporary or permanent hearing impairment. Over an extended period of time, even levels that seem to be uncritical can cause hearing damage.

- Decrease the volume level immediately if you experience ringing in your ears or hearing impairment. If this is not possible, keep a greater distance or use sufficient ear protectors.



NOTICE

Operating conditions

This device has been designed for indoor use only.

- To prevent damage, never expose the device to any liquid or moisture. Avoid direct sunlight, heavy dirt, and strong vibrations.

3 Features


The characteristics of this three frequency speaker:

PKT1 is a high-performance coaxial three frequency speaker.

HF and MF adopt coaxial design, which can combine mid range and high co frequency for better main

sound. LF is a dual 12 inch bass speaker that can bring greater mid range and bass energy.

The combination of PKT1 and SUB21 is a big dynamic, wide frequency response, high sound pressure, high transient, and durable combination, bringing DJ entertainment a higher level of public opinion.



4 Applications



Electric
music festival

Large/Medium/Small

Live House

Large/Medium/Small

Party K

Large/Medium/Small

High
Altitude Bar

Large/Medium/Small

5 Installation

Unpack the device and check carefully that there is no transportation damage before using the unit. Keep the equipment packaging. To fully protect the product against vibration, dust and moisture during transportation or storage use the original packaging or your own packaging material suitable for transport or storage, respectively.

Create all connections while the device is off. Use the shortest possible high-quality cables for all connections.



WARNING

Risk of injury caused by falling objects

Make sure that the installation complies with the standards and rules that apply in your country. Always secure the device with a secondary safety attachment, such as a safety cable or a safety chain.



NOTICE

Possible property damage by magnetic fields

Loudspeakers produce a static magnetic field

→ Therefore maintain an appropriate distance to devices that can be adversely affected or damaged by an external magnetic field.



NOTICE

Use of stands

→ When mounting the device onto a stand, ensure that the stand is in a safe and stable position and that the weight of the device does not exceed the maximum permissible load capacity of the stand.


We recommend you to set up the speakers in a way that their sound signals can reach the audience unobstructed. It will often be helpful to mount the speakers on tripods. Thus, the sound will be evenly spread with maximum range throughout the audience area.

Always use high grade cables to connect your equipment. Otherwise you won't reach maximum sound quality.


For optimum results both impedance and power rating of the speaker must match the requirements of the amplifier /input signal. Consider the technical specifications of the speakers connected, the overall impedance of the connected loudspeakers shall not be less than the minimum output impedance of the amp. The amps max, RMS output power should be 50% above the power handling capacity of the connected speakers.

If you notice distortion, the amp or the speaker is over loaded during operation. This may destroy permanently the amp or the speaker. Pls reduce the volume as soon as you notice distortion.


Installation method




Lateral hanging by lanthanum rope



Vertical hanging by steel wire rope




Horizontal hanging




Tripod installation




wall hanging



horizontal hanging by U-shaped hanger




Vertical hanging by U-shaped hanger



Installation of three vertical hanging combinations



Installation of two vertical hanging combinations



Installation of three horizontal hanging combinations

Accessories



Wall bracket



Horizontal hang of bracket



M8 buckle




Speaker connector



M10 flying ring




Connecting ring



U-shaped groove with slider



Flying frame



tripod

6 Technical specifications

External three frequency division system parameters:


Unit	100 core mid range and 65 core high range are coaxial designs 100 core dual 12 "bass unit
Rated power	LF: 1200W, MF: 160W, HF: 80W
Sensitivity	LF: 102dB, MF: 115dB, HF: 115dB
Impedance	LF: 8 Ω , MF: 8 Ω , HF: 8 Ω
SPL	LF: 141dB, MF: 143dB, HF: 143dB
Frequency Response(-3dB)	LF45Hz-1.1kHz MF400Hz-4.1kHz HF2.2kHz-18kHz
Product dimensions (W×H×D)	400mm×425mm×750mm
Net gross	38.6kg

Built in three frequency division system configuration (In conjunction with DMACH4.8):


Frequency Response	45Hz–20kHz
Sensitivity	102dB
Power	1200W
Impedance	8 Ω




Frequency response PTK1

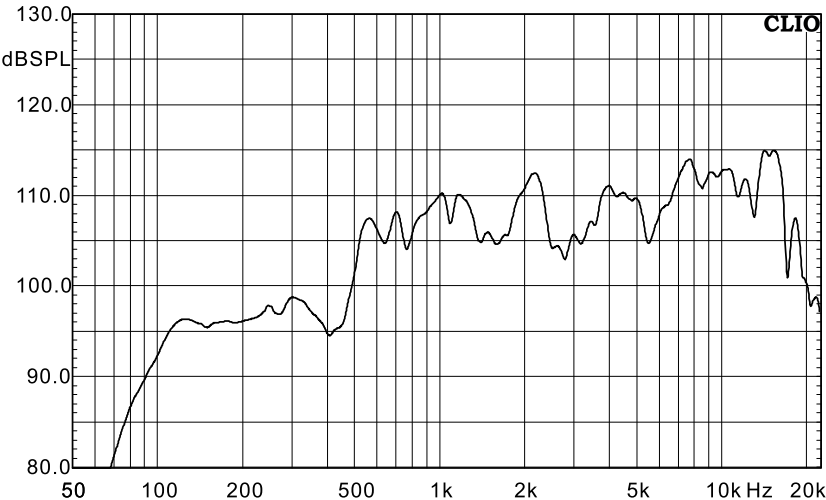


Frequency response PTK1(match with DMACH4.8)

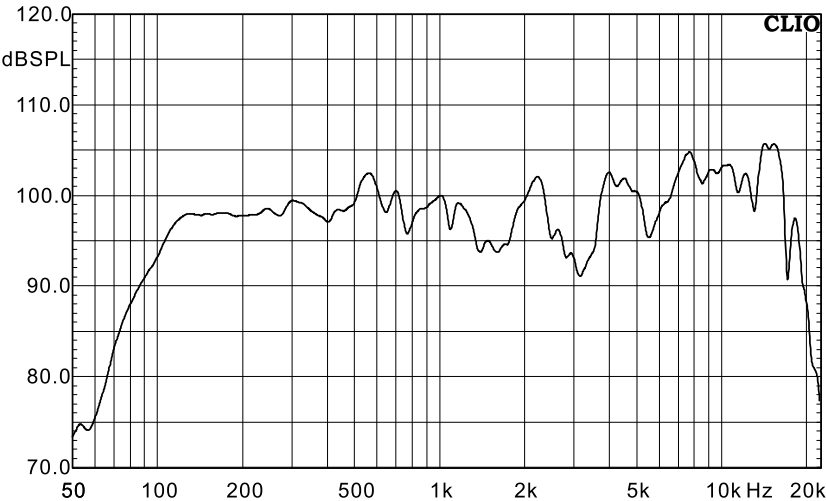

Impedance

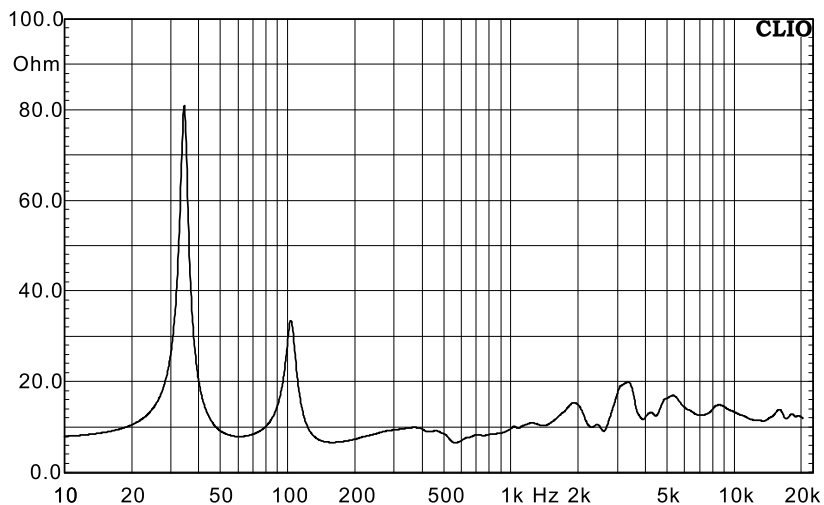

2D Dimensional Drawing

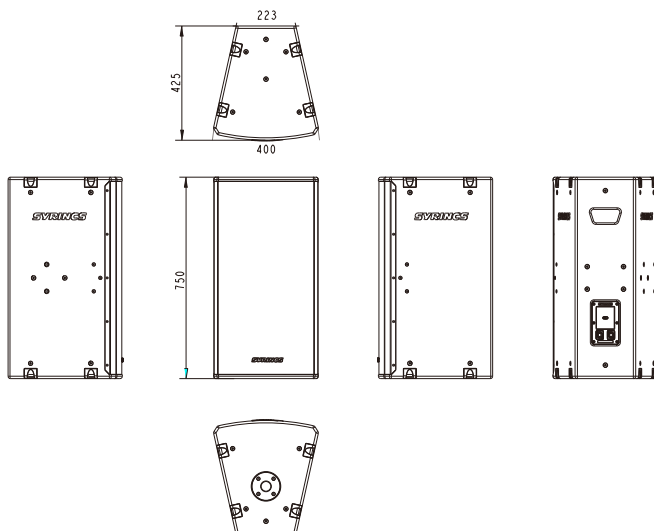


7 Plug and connection assignment

Installation

This chapter will help you select the right cables and plugs to connect your valuable equipment in such a way that a perfect sound experience is ensured.

Please follow these tips, because special care is required when dealing with sound and light: Even if a plug fits into the socket, an incorrect connection may result in a destroyed power amp, a short circuit or just in poor transmission quality!

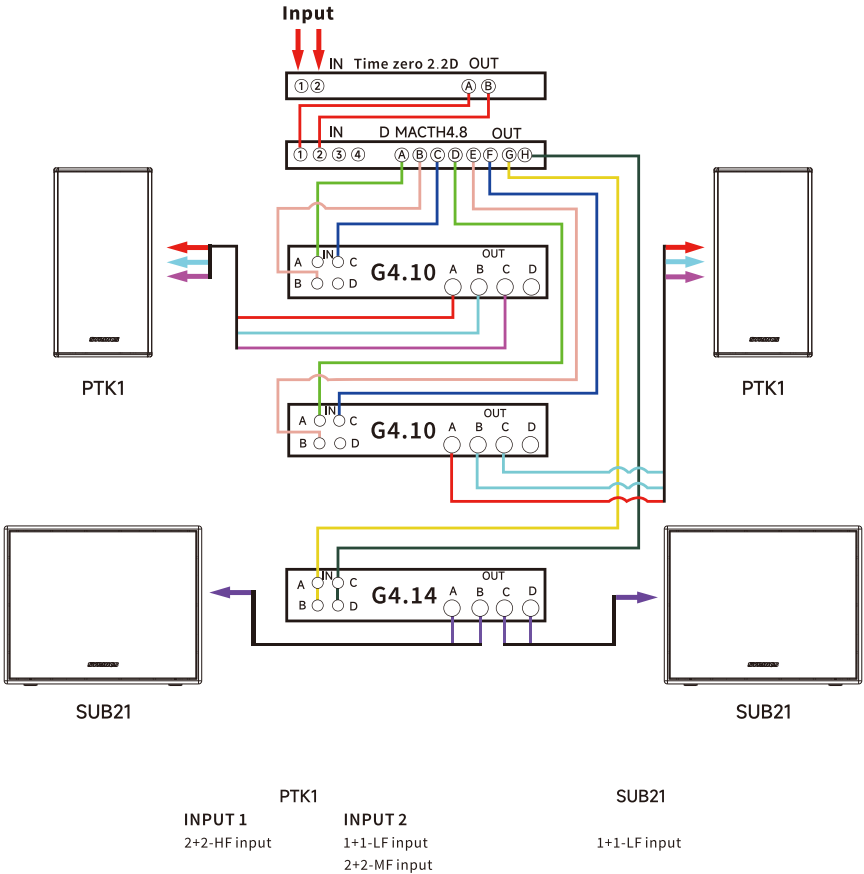

8 Protecting the environment

Packaging



For the packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of.

Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

Disposal of your old device



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.

1 本手册的一般信息

本用户手册包含有关本机安全操作的重要说明。阅读并遵守安全说明和所有其他说明。保存该手册供将来参考。确保它可供所有使用者使用装置。如果您出售本机，请确保买方也收到本手册。


我们的产品处于不断发展的过程。因此，他们可能会改变。

使用的信息词

本手册中的所有预防措施都清楚地突出显示。以下信号单词用于预防措施

危险	这警告如果未遵守说明可能导致严重伤害或死亡的危险
警告	如果不遵循说明，这警告可能导致严重伤害或死亡的危险和/或可能造成重大财产损失。
小心	如果不遵循说明，这警告可能导致可逆伤害或相当大的物质损坏的危险。
注意	这警告操作过程中可能导致故障的危险或可观的材料损坏。如果不遵守说明，也可能造成环境损害。

使用的标识

		
危险位置的一般警告	悬移警告	注意

2 安全

預期用途

該設備被設計為应用于PA系統。僅按照本用戶手冊中的說明使用設備。在其他操作條件下的任何操作被認為是不適當的，並可能導致人身傷害或財產損失。由于使用不當而造成的損失制造商不承擔任何責任。此設備祇能由具有足夠的專業技能，感官和智力能力并具有相應知識和經驗的人員使用。其他人員祇有在受到負責其安全的人員的監督或指導的情況下才可以使用此設備

安全須知



危險

可能對兒童造成危害

確保塑料袋，包裝等妥善處理，不在嬰幼兒接觸範圍內，有窒息的危險！

- 確保兒童不會從產品上分離任何小部件（例如旋鈕等）。他們可能吞下這些碎片並噎死！
- 絕對不要讓兒童單獨與電子設備一起。



小心

可能有聽力危害

該設備可能產生導致暫時性或永久性聽力受損的音量級別。在很長一段時間內，即使看似不特別的水平可能會導致聽力受損。

- 如果您經歷耳鳴或聽力障礙，請立即降低音量。如果這不可行，請保持更遠的距離或使用足夠的護耳器。



注意

操作條件


本裝置僅供室內使用。

- 為了防止損壞，不要將設備暴露在任何液體或濕氣中。避免陽光直射，污垢和強烈的震動。

3 特性

這款三分頻揚聲器的特點：

PKT1是高性能的同軸三分頻音箱，
HF和MF採用同軸設計能把中音和
高同頻結合主聲音更好，LF是雙
12寸低音喇叭能帶來更大的中低
音能量。PKT1和SUB21組合起來
就是一個大動態，頻響寬，高聲
壓，瞬態高，耐用的組合，讓DJ
娛樂帶來更高的層次與感覺。



4 產品應用場景



電音節

大型/中型/小型

Live House

大型/中型/小型

Party K

大型/中型/小型

高空酒吧

大型/中型/小型

5 安裝

打開設備包裝并在使用本設備前仔細檢查是否存在運輸損壞。保存設備包裝。爲了在運輸或存儲過程中充分保護產品免受振動，灰塵和濕氣的影響，請使用原包裝或您自己的適用于運輸或儲存的包裝材料。

在設備關閉時搭建所有連接。使用盡量短的高質量綫材連接。



警告

墜落物造成傷害的風險

確保安裝符合標準和規則適用于您的國家。請使用安全裝置來保護設備，例如如安全繩或安全鏈。



注意

可能被磁場破壞

揚聲器產生靜態磁場

→ 因此與可能受負面影響的設備保持適當距離，避免受外部磁場影響或損壞。



注意

支架的使用

→ 將設備安裝到支架上時，請確保支架處於安全穩定的位置，并且設備的重量不會超過支架的最大允許負載能力。


我們建議您以某種方式設置本產品，使其聲音信號能夠暢通無阻地傳達給觀眾。將本產品安裝在三腳架上通常會很有幫助。因此，聲音將在整個觀眾區域均勻分布，并具有最大傳播範圍。

使用高質量的電纜連接設備。否則不會達到最大的聲音質量。


爲獲得最佳效果，本產品的阻抗和額定功率必須符合功放輸入信號的要求。考慮本產品的技術規格，連接的音箱總阻抗不得低於功放的最小輸出阻抗。功放最大RMS輸出功率應該比所連接音箱的功率處理能力高出50%。

如果在操作過程中發現聲音重放時有失真，放大器或本產品過載，這可能會永久損壞功放或本產品，一旦發現聲音重放時有失真，請減小音量。


安裝方式




鋼絲繩橫吊



鋼絲繩豎吊




橫吊




三腳架落地安裝




壁掛





U型吊掛橫吊




U型吊掛豎吊



三祇豎吊組合安裝



兩祇豎吊組合安裝



三祇橫吊組合安裝

配件



掛牆支架



支架橫吊



M8登山扣




音箱連接件




M10吊環




卸扣



U型槽配滑塊



吊架



三角架

6 技術規格說明


外置三分頻系統參數：

單元	100芯中音和65芯高音是同軸設計 100芯雙12"低音單元
功率(額定)	低音1200W，中音160W，高音80W
靈敏度	低音102dB，中音115dB，高音115dB
阻抗	低音8 Ω ，中音8 Ω ，高音8 Ω
最大聲壓級	低音141dB，中音143dB，高音143dB
頻率響應(-3dB)	低音45Hz - 1.1kHz 中音400Hz - 4.1kHz 高音2.2kHz - 18kHz
產品尺寸(W×H×D)	400mm×425mm×750mm
淨重	38.6kg


內置三分頻系統參數（配合DMACH4.8）：

頻率響應	45Hz-20kHz
靈敏度	102dB
功率	1200W
阻抗	8 Ω


頻率曲綫

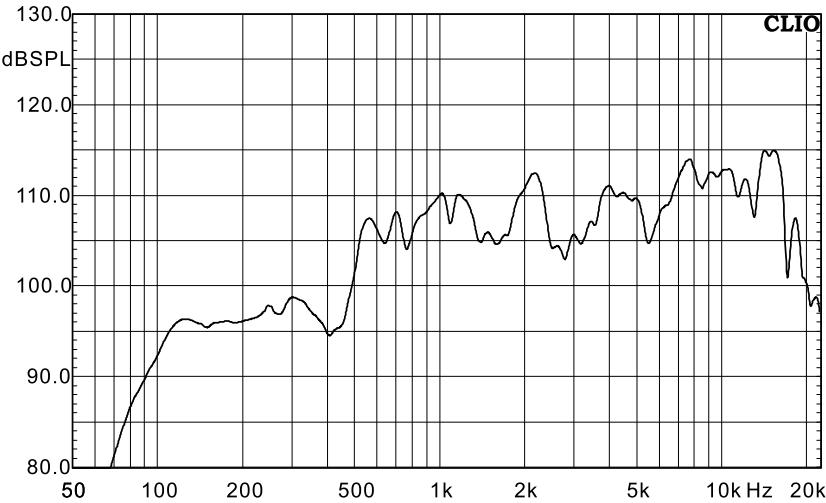


頻率曲綫(配合D MACH4.8)

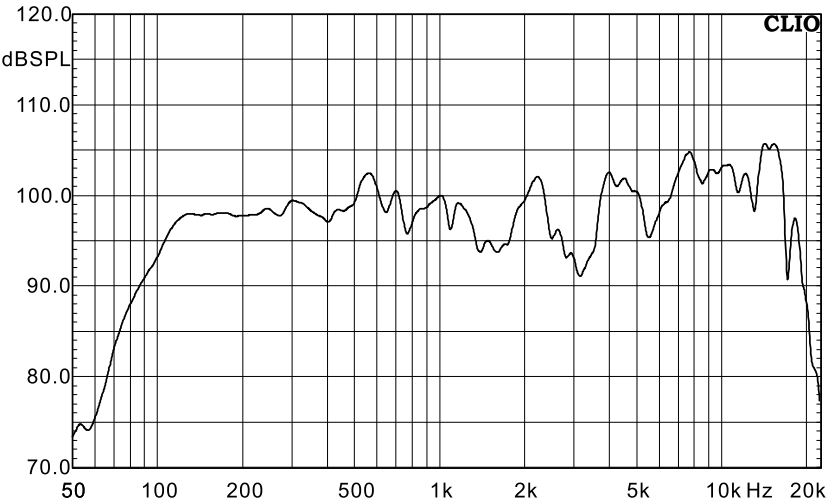

阻抗

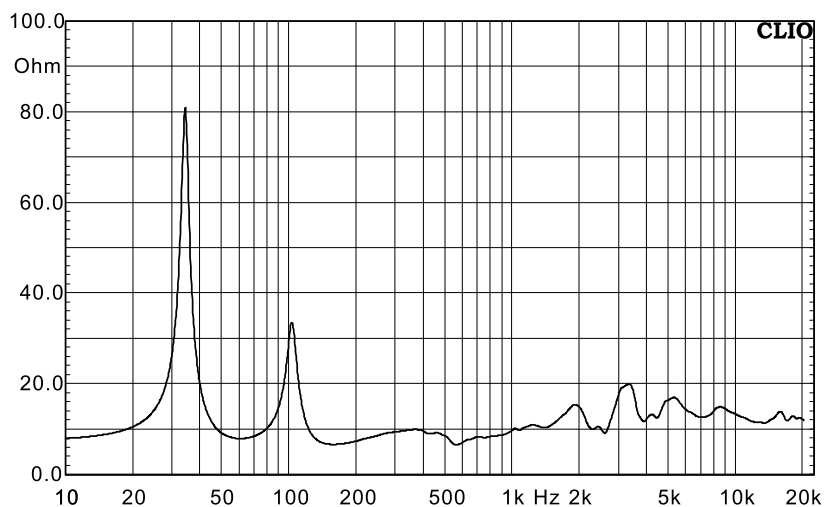

二維尺寸圖

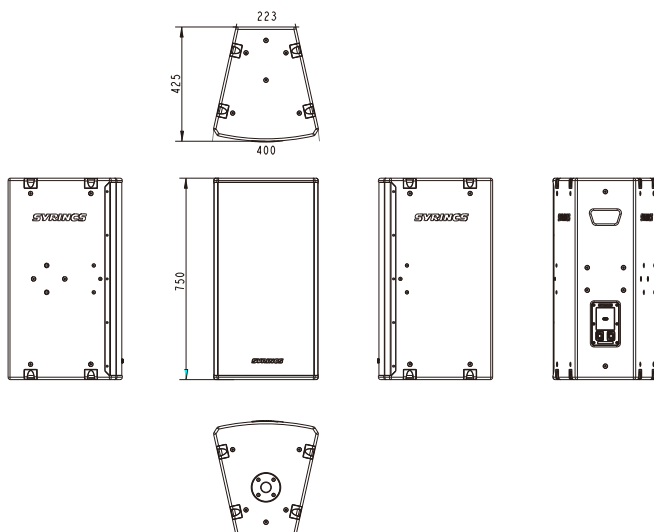


7 插頭和連接分配

介紹

本章將幫助您選擇合適的電纜和插頭，以確保完美的聲音體驗，連接貴重設備。

請遵循以下提示，因為在處理聲光時需特別小心：即使插頭插入插座，錯誤的連接也可能導致功放損壞，短路或傳輸質量差！

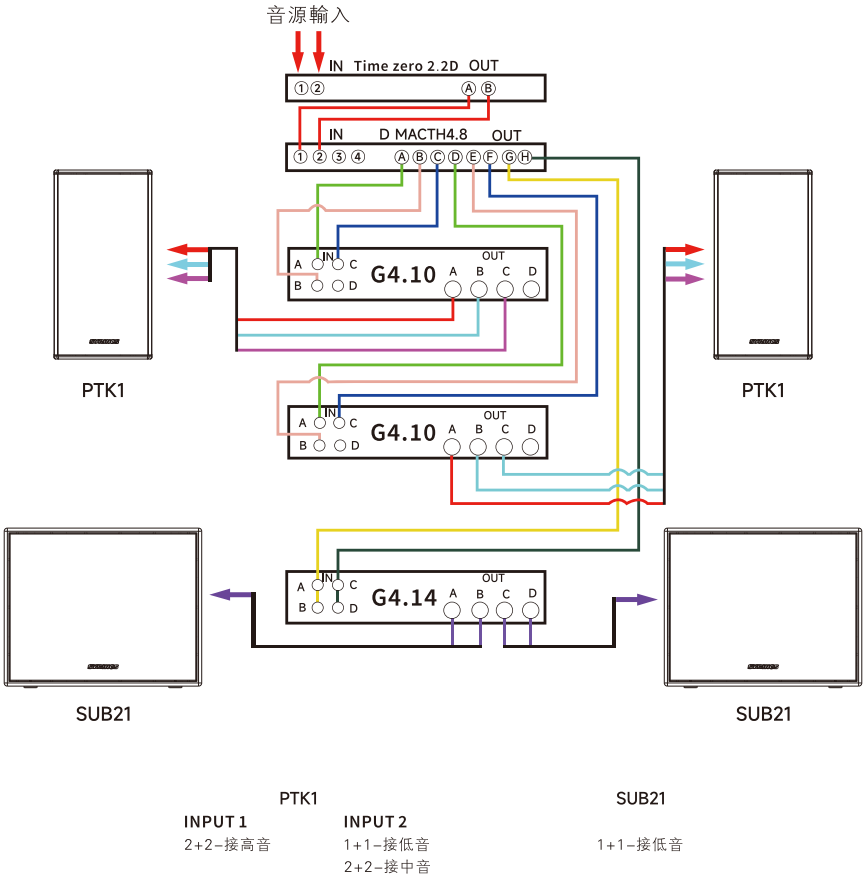

8 環境保護

包裝



對於包裝，選擇了可用于正常回收的環保材料。確保塑料袋，包裝等妥善處理。

不要僅僅將這些材料與日常生活垃圾一起處理，但要確保將它們被收集回收。請遵循包裝上的注意事項和標記。



舊設備處置

本產品受當前有效版本的歐洲廢棄電子電氣設備指令（WEEE）約束。不要當做日常生活垃圾處理。

通過認可的廢物處理公司或通過當地的廢物處理設施處置此設備。丟棄設備時，請遵守貴國適用的規則和規定。如有疑問，請諮詢當地的廢物處理設施。

